

# Apéro

convectair.com 27



## INSTALLATION AND CONNECTION

**Installation height** 4 in (10 cm).

### Clearances

■ **Front:** 20 in (50 cm) ◀ **Sides:** 6 in (15 cm) ▲ **Above:** 4 in (10 cm).


**Installation** Quick-mounted surface installation with easy snap-on bracket that also serves as marking template.

**Connection** 240-V unit: Flexible cord connection, including junction box cover.

Installation requires 2 in X 3 in wall box (not included).

120-V unit: Plug-in connection with 6 ft flexible cord.

**Note** 3-conductor cable or 2-conductor cable with a third wire should be used if unit is to be linked with the Convectair Programmer module (7392 FP).

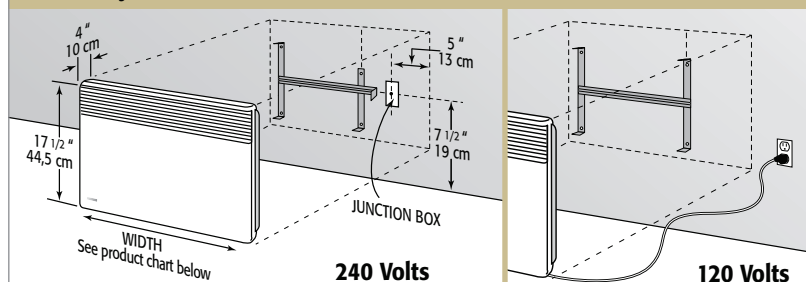

Photos / pages 13, 14, 16 & 17

## HEATING ELEMENT

**Total capacity** 500 to 2000 W

 **Basic heating Convection** X-shaped, monoblock element made of surface-treated extruded aluminum.


**Thermal protection** 240-V and 120-V units: Manual reset overheat protection.

## TEMPERATURE CONTROL

 **Electronic thermostat** Built-in electronic proportional-action thermostat ultraprecise to 1/5°F (1/10°C).

**Programmer** Programmer-compatible, pilot wire only.

## CONTROL PANEL "Selection of scale of temperature - C or F."

 **Location** Located on top right hand side of the unit.

### 240-V unit:

« + and - » **Keys** Set the temperature and lock the controls.  
**Key 1** 5-Operating mode selection key: Comfort; Economy; Frost protection (45°F ( 7°C)); Heat off; Program (automatic setback when connected to the Convectair Programmer).  
**Switch** On/Off switch (side of unit).  
**Indicator light** Heating indicator light.  
**Indicator light** Programmer indicator light.

### 120-V unit:

**Dial** Lockable thermostat control dial and Frost protection (45°F ( 7°C)).  
**Selector** On/Off switch.  
**Indicator light** Heating indicator light.



## CABINET


 **Steel** construction with polyester/epoxy anti-rust powder coating.

**Cabinet** Bottom-mounted protective pan with rounded edges.

**Louvres** Front-louvered air outlet that hides the unit interior and directs heat towards the centre of the room.

**Color BB** = White (240-V unit) **BM** = Mimetic white (120-V unit).

MODEL	Catalog No.	Color	Power		Height		Width		Thickness		Weight	
			240-V	208-V	cm	in	cm	in	cm	in	kg	lb
APÉRO ②	7359-C05	BB	500 W	375 W	44,5	17 1/2	34	13 3/8	10	4	3,2	7,1
	7359-C07	BB	750 W	562 W	44,5	17 1/2	34	13 3/8	10	4	3,2	7,1
	7359-C10	BB	1 000 W	750 W	44,5	17 1/2	42	16 1/2	10	4	3,8	8,4
	7359-C12	BB	1 250 W	937 W	44,5	17 1/2	50	19 5/8	10	4	4,2	9,3
	7359-C15	BB	1 500 W	1 125 W	44,5	17 1/2	58	22 7/8	10	4	4,9	10,8
	7359-C17	BB	1 750 W	1 312 W	44,5	17 1/2	66	26	10	4	5,4	11,9
	7359-C20	BB	2 000 W	1 500 W	44,5	17 1/2	74	29 1/8	10	4	6,1	13,5
<b>120 VOLTS   PLUG-IN</b>												
APÉRO ④	7358-B05	BM	500 W		44,5	17 1/2	34	13 3/8	10	4	3,6	7,9
	7358-B12	BM	1 250 W		44,5	17 1/2	66	26	10	4	5,3	11,7



		WIDTH / BRACKET						
		500 W	750 W	1000 W	1250 W	1500 W	1750 W	2000 W
7359		5 in 12,8 cm	5 in 12,8 cm	8 1/4 in 20,8 cm	8 1/4 in 20,8 cm	7 in 17,8 cm	9 3/4 in 24,8 cm	12 3/8 in 32 cm
7358		2 3/4 in 7 cm	—	—	9 3/4 in 25 cm	—	—	—

- ② Compatible with the Programmer system. (see technical specifications for catalogue number 7392).
- ④ Not compatible with the Programmer system. For use with 120 V outlets.

For guaranteed, dependable operation, we recommend that all units be installed by a licensed electrical contractor. Consult **convectair.com** to find the most recent installation instructions for our heaters.

