




Tenor


With its refined look in steel and smoked glass, the **Tenor's** elegance is particularly attractive. It combines natural convection heating and immediate perceptible heat with its low-temperature radiant panel when you're looking for "hot spot".

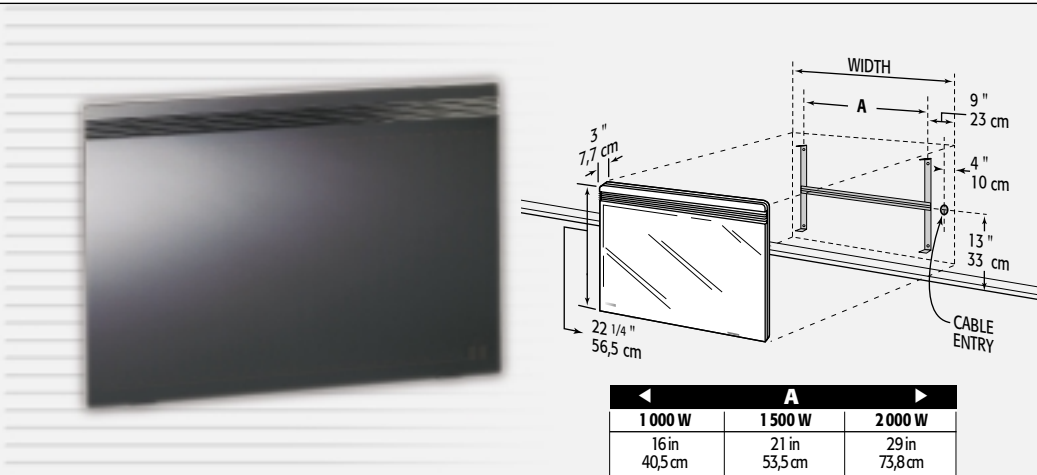


HEATING ELEMENTS

-  **Basic heating Convection** : X-shaped, monoblock element made of surface-treated extruded aluminum.
-  **Radiant heat** : Smoked glass radiant panel with enamelled silver heating circuit.
(1000 to 2000 W) Automatic reset overheat protection with warning lights.


TEMPERATURE CONTROL

-  **Electronic thermostat** Built-in electronic proportional-action thermostat ultrasensitive to 1/10°C (1/5°F).


CONTROL PANEL

-  **Location** Located on top right hand side of the unit with see-through lockable protective cover.
- Dial 1** Thermostat control dial can be locked.
- 2** Economy adjustment dial (setback can be set between 2°C / 4°F and 7°C / 13°F below the Comfort setting).
- Mode-function selector** 5-mode-function selector with indicator light: Off; Comfort; Economy; Frost protection (8°C / 45°F); Program (automatic setback when connected to the Convectair Programmer – see technical specifications for catalogue number 7392).
- Indicator light** Heating indicator light.

CABINET

-  **Steel construction** with polyester/epoxy anti-rust powder coating.
- Cabinet** Bottom-mounted protective pan and built-in side wire covers.
- Louvres** Front-louvered air outlet that hides the unit interior and directs heat towards the centre of the room.
- Color** CB = Sepia Black

INSTALLATION

-  **Installation** Quick-mounted surface installation with easy snap-on bracket.
- Connection** Rear power cable connection with double wire holder. Rear wire knock-out for armoured cable installation.
- Installation height** 4 in (10 cm).
- Clearances** ■ **Front:** 30 in (75 cm) ◀ **Sides:** 6 in (15 cm) ▲ **Above:** 6 in (15 cm).
- Note** 3-conductor cable or 2-conductor cable with a third wire should be used if unit is to be linked with the Convectair Programmer module (7392 FP).

MODEL	Catalog No.	Color	Power 240-V	Height		Width		Thickness		Weight	
				cm	in	cm	in	cm	in	kg	p
TENOR ② (SP)	7715-C10	CB	1 000 W	56,5	22 1/4	80,5	31 3/4	10	4	15,9	35,0
	7715-C15	CB	1 500 W	56,5	22 1/4	100	39 3/8	10	4	19,1	42,1
	7715-C20	CB	2 000 W	56,5	22 1/4	120	47 1/4	10	4	22,5	49,5

② Compatible with the Convectair Programmer system (see technical specifications for catalogue number 7392).
 (SP) Control panel designed to accept the 7392 Programmer module.

For guaranteed, dependable operation, we recommend that all units be installed by a licensed electrical contractor.

