




All-in-one innovative, the **Boléro** is an electric bathroom heater, as well as a year-round towel warming and dryer. It is designed using safe and proven technologies.


# Boléro

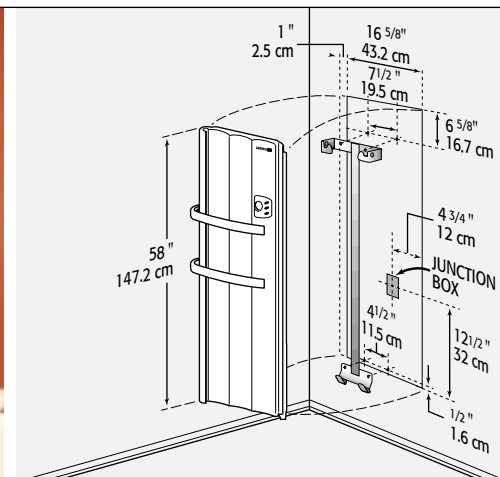


## HEATING ELEMENTS

-  **Basic heating** *Radiant:* Radiant front panel with integrated surface element. Manual reset overheat protection. (750 W)
-  **Quick heat** *Fan-forced heat:* Low-thermal-mass heating element combined with low-pressure centrifugal blower. Resettable overheat protection. (1250 W) Reset by turning heater off.


## TEMPERATURE CONTROL

-  **Digital thermostat** Built-in 2-stage digital thermostat ultrasensitive to 1/10°C (1/5°F) for radiant front panel and full power mode control (2000 W radiant and fan-forced heat).
- Timer** One-touch electronic timer: 30-minutes, 1 hour, 2 hours for quick heating or fast drying, with indicator light.


## CONTROL PANEL

-  **Location** Located on the front of the unit.
- Dial** Thermostat control.
- One-touch button**
  - 1 On/Off, also serves as overheat protection reset and as full power mode selector with indicator light.
  - 2 Timer control with indicator light.
  - 3 Room temperature ventilation control with indicator light.
- Indicator light** Heating indicator light.

## CABINET

-  **Steel construction** with polyester/epoxy anti-rust powder coating.
- Cabinet** Splash-proof construction with rounded edges and built-in side wire covers.
- Louvres** Lateral cross flow air outlet, drying towels and moving air horizontally across the room.
- Filter** Easy-to-clean, removable rear-mounted dust filter for easier maintenance.
- Accessories** Three (3) bars and two (2) pegs included.
- Color** BB = White

## INSTALLATION

-  **Installation** Quick-mounted surface installation with screw-in bracket, that also serves as marking template.
- Connection** Flexible armoured power cord supplied with heater. Installation requires wall box (not included).
- Installation height** 6 in (15 cm)
- Clearances** ■ **Front:** 20 in (50 cm)    ◀ **Sides:** 6 in (15 cm)    ▲ **Above:** 6 in (15 cm).

MODEL	Catalog No.	Color	Power 240-V	Height		Width		Thickness		Weight	
				cm	in	cm	in	cm	in	kg	p
BOLÉRO ②	7657-C20	BB	2 000 W	146,7	58	42,7	16 5/8	16,8	6 3/8	19,0	41,8
				WITH BARS		42,7	16 5/8	22,5	9	--	--

② Compatible with the Convectair Programmer system (see technical specifications for catalogue number 7392).

**For guaranteed, dependable operation, we recommend that all units be installed by a licensed electrical contractor.**

