



Jetstream

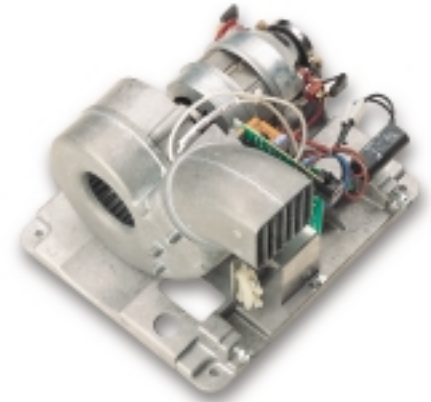

When Convectair set out to make the **Jetstream** automatic hand dryer, they put all their technological expertise and years of designing electrical heating devices to work. It's specifically designed for public places and other high-traffic areas, including shopping centres, sports centres, hospitals, restaurants and hotels.

AUTOMATIC HAND DRYER

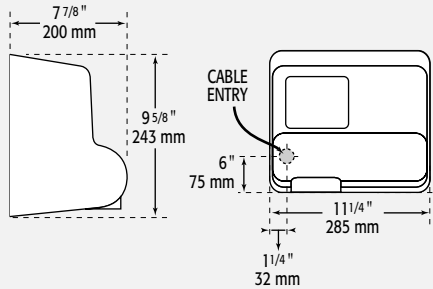

HEATING ELEMENT

Blower : 2150 W or 2500 W element mounted downstream from turbine for rapid heating, maximum efficiency and minimum heat loss.

TEMPERATURE CONTROL

Motor Powerful 1/3 HP universal motor (250 W) for superior performance and long life.

Turbine High-efficiency turbine for reduced drying time. Rotation speed : 7500 rpm.

Timed-infrared electronic sensor for automatic start and stop, total hygiene and maximum economy.

Output temperature 60°C (140°F) at a room temperature of 22°C (72°F).

Airflow 5,5 m³ / min (195 cfm)

CABINET

Cover Aluminum die cast with heavy duty powder coated polyester finish.

Interior assembly Die cast monoblock housing designed for improved air flow and enhanced performance.

Weight 5.7 kg (12 1/2 p)

Color BB = White (other colors available on request).

Note Cover secured with tamper proof screws.

MODEL	Catalog No.	Color	Voltage (V)	Nominal Power (W)	AMPS (A)	Heating Element (W)
JETSTREAM	2517-C24	BB	120	2400	20,0	2150
	2517-C27	BB	208 -240	2063 - 2750	10,0 - 11,5	1875 - 2500

For guaranteed, dependable operation, we recommend that all units be installed by a licensed electrical contractor.

